
# [FREEDownload Latest 300-070 Exam Questions from Braindump2go (72-84)]

## CISCO NEWS: 300-070 Exam Questions has been Updated Today! Get Latest 300-070 VCE and 300-070 PDF Instantly! Welcome to Download the Newest Braindump2go 300-070 VE&300-070 PDF Dumps:

http://www.braindump2go.com/300-070.html (145 Q&As) Do you want to pass Cisco 300-070 Exam ? If you answered YES, then look no further. Braindump2go offers you the best 300-070 exam questions which cover all core test topics and certification requirements. All REAL questions and answers from Cisco Exam Center will help you be a 300-070 certified! Exam Code: 300-070 Exam Name: Implementing Cisco IP Telephony & Video, Part 1 v1.0Certification Provider: Cisco300-070 Dumps, 300-070 Exam Questions, 300-070 PDF, 300-070 VCE, 300-070 Study Guide, 300-070 Braindump, 300-070 Practice Exam, 300-070 Practice

# Test, 300-070 Book, 300-070 eBook Implementing Cisco IP Telephony & Video, Part 1 v1.0: 300-

#### 070

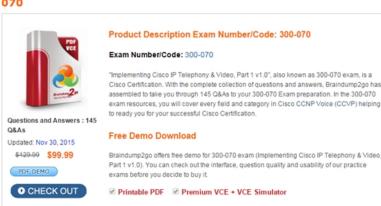

QUESTION 72What are the two benefits of using SIP dial rules on an IP phone? (Choose two) A. The phone can initiate dialing without sending any signaling messages to Cisco Unified CommunicationsManager.B. The phone can detect invalid numbers and play a reorder tone without sending any signaling messages to Cisco Unified Communications Manager.C. If dialed digits match an entry of a SIP dial rule, the dialed string is sent in a single SIP 200 OK message toCisco Unified Communications Manager.D. If Cisco Unified Communications Manager requires more digits, KPML can be used to send the remainingdigits from the SIP phone to Cisco Unified Communications Manager one-by-one.E. If Cisco Unified Communications Manager requires more digits, another en bloc message is used to sendthe remaining digits from the SIP. Answer: BD QUESTION 73Which three Cisco Unified CallManager configuration steps are required to support third party SIP phones? (Choose three.) A. Configure the device in Cisco Unified CallManager.B. Change the proxy address in the SIP phone to an IP address or the Fully Qualified Domain Name (FQDN) of Cisco Unified CallManager.C. Associate the device with the end user.D. Configure the phone with the TLS username and password.E. Configure the end user in Cisco Unified CallManager.F. Add the MAC address of the Cisco Unified CallManager server to the SIP phone configuration page. Answer: ACE QUESTION 74Which four software based media resources require that the Cisco IP voice media stream Application be activated? A. MOH.B. SIP.C. H.323 Gateways.D. Annunciator. E. Gatekeeper.F. MTP.G. Audio conferencing. Answer: ADFG QUESTION 75Which protocol is recommended to be used between Cisco Unified Communications Manager and the voice gateway to simplify the dial plan? A. SIP.B. SCCP.C. H323. D. RSVP.E. MGCP. Answer: E QUESTION 76Which protocol can Cisco Unified Communications Manager not use to monitor the status of the gateway? A. H.323B. SIPC. MGCPD. SCCP Answer: A QUESTION 77In a centralized call-processing solution, there are five sites connected through an IP WAN. To optimize the utilization of the IP WAN, CAC needs to be implemented. How should CAC be implemented? A. Use a gatekeeper to control allocated bandwidth properly.B. Use locations CAC with a single location.C. Use a gatekeeper and Cisco Unified Border Element to provide CAC to sites that use a combination of SIPand MGCP gateways.D. Use a gatekeeper to only control those locations that use H.323 gateways and a Cisco Unified BorderElement to control those sites that use MGCP or SIP gateways.E. Use locations CAC with five locations in addition to Hub none. Answer: E QUESTION 78Which two features are advantages of deploying a cluster over WAN? (Choose two.) A. Shared line appearances B. Centralized DSP resources C. Extension mobility within the cluster D. Scalability up to 20 sites, if there is sufficient IP WAN bandwidthE. Failover to co-resident Cisco UnifiedCall Manager Express platforms Answer: AC QUESTION 79The Ajax Corporation is designing an IP telephony network using Cisco MCS 7845 Series servers, each one capable of supporting 7500 devices. The design must meet these requirements:- Be cost-effective- Support up to 7500 phones- Provide a minimal level of redundancy A. Two Cisco Unified Communications Manager servers:1 publisher and TFTP server combined.1 primary subscriber. Three Cisco Unified Communications Manager servers:1 publisher and TFTP server combined.1 primary subscriber.1 backup B subscriber.C. Four Cisco Unified Communications Manager servers:1 publisher.1 TFTP server.1 primary subscriber.1 backup subscriber.D. Five Cisco Unified Communications Manager servers:1 publisher.1 TFTP server.1 primary subscriber.2 backup subscribers. Answer: B OUESTION 80How are Cisco Unified CallManager location parameters used? A. Assign directory numbers to devices as they connect to the IP telephony network.B. Specify the bandwidth used for audio and video calls.C. Implement call admission control in a centralized call processing deployment.D. Provide alternate call routing when the primary call path is unavailable. Answer: C QUESTION 81Which statement regarding Cisco IP voice media streaming application is correct? A. It should be activated on the gateway in cluster that supports the TFTP service.B. It should be activated on the gatekeeper in cluster that supports the TFTP service.C. It should be activated on the node in cluster that does not support the TFTP service.D. It should be activated on the node in cluster that supports the TFTP service. Answer: D QUESTION 82Which option describes how you add software conference bridges to Cisco Unified Communications Manager? A. By adding a Cisco Unified CM server to the cluster.B. By adding a software conference bridge using Conference Bridge Configuration.C. By installing DSP to a Cisco Unified CM server.D. By reassigning other media resources to conference resources. Answer: A QUESTION 83 Which of these media resources can be configured in Cisco Unified Communication manager? (Choose Three) A. MOH ServerB. Voice Termination Point DSPC. TranscoderD. Auto AttendantE. Conference Bridge Answer: ACE QUESTION 84What is the relationship between a Region and a Location? A. The Region codec parameter is used between a Region and its configured Locations.B. The Region setting for a Location sets the number of audio and video calls that Location can support.C. The codec parameter configured in the Region is only used between Regions and Location bandwidth isonly used between Locations.D. The Region codec parameter is combined with Location bandwidth when communicating with other Regions. Answer: C Latest 300-070 Questions and Answers from Cisco Exam Center Offered by Braindump2go for Free Share Now! Read and remember all Real

Questions Answers, Guaranteed Pass 300-070 Real Test 100% Or Full Money Back!

### Implementing Cisco IP Telephony & Video, Part 1



070

Product Description Exam Number/Code: 300

#### Exam Number/Code: 300-070

"Implementing Cisco IP Telephony & Video, Part 1 v1.0", also lo Cisco Certification. With the complete collection of questions ar assembled to take you through 145 Q&As to your 300-070 Exa exam resources, you will cover every field and category in Cisc to ready you for your successful Cisco Certification.

#### Free Demo Download

Braindump2go offers free demo for 300-070 exam (Implementii Part 1 v1.0). You can check out the interface, question quality a exams before you decide to buy it.

Printable PDF Premium VCE + VCE Simulator

FREE DOWNLOAD: NEW UPDATED 300-070 PDF Dumps & 300-070 VCE Dumps from Braindump2go: http://www.braindump2go.com/300-070.html (145 Q&A)