


[100% PASS GUARANTEED] Up-To-Date Braindump2go Cisco 400-101 Exam Dumps PDF Files Free Download

Important News: Cisco 400-101 Exam Questions Updated Today! Want to know New Questions in 2015 400-101 Exam? Download Free Braindump2go 400-101 Exam Preparation Materials Now! 100% Pass 400-101 Real Test is not a dream! Braindump2go Latest Released 400-101 Exam Practice Exam Dumps will help you pass 400-101 Exam one time easily! Free Sample Exam Questions and Answers are offered for free download now! Quickly having a try today! Never loose this valuable chance! Keywords: 400-101 Exam Dumps, 400-101 Practice Tests, 400-101 Practice Exams, 400-101 Exam Questions, 400-101 PDF, 400-101 VCE Free, 400-101 Book, 400-101 E-Book, 400-101 Study Guide, 400-101 Braindump, 400-101 Prep Guide, CCIE Routing and Switching Written Exam, v5.0

Compared Before Buying Cisco 400-101 PDF & VCE!

Pass4sure	Braindump2go 100% Pass OR Money Back	Test King
650 Q&As – Practice	727 Q&As – Real Questions	650 Q&As – Practice
269.96	\$99.99	278.96
No Discount	Coupon Code: BDNT2014	No Discount

QUESTION 620 Which EIGRP packet types are sent as unicast packets? A. hello, update, query B. query, SIA query, reply C. SIA query, reply, ACK D. query, SIA query, SIA reply Answer: C QUESTION 621 What is a reason for an EIGRP router to send an SIA reply to a peer? A. to respond to an SIA query with the alternative path requested B. to respond to a query reporting that the prefix has gone stuck-in-active C. to respond to an SIA query that the router is still waiting on replies from its peers D. to respond to a reply reporting that the prefix has gone stuck-in-active Answer: C QUESTION 622 Refer to the exhibit. Which prefixes will appear in the EIGRP topology table?

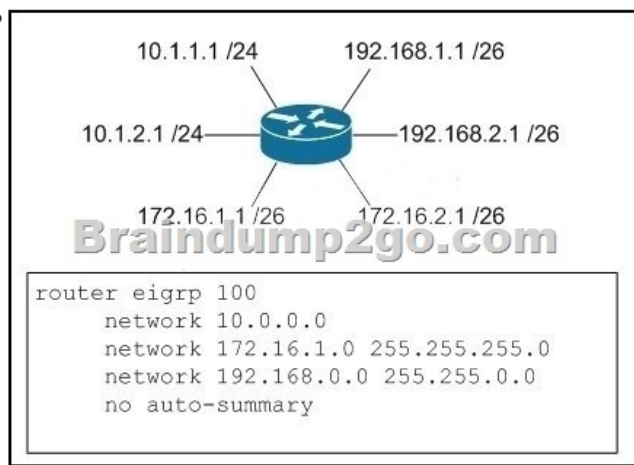

A. 10.0.0.0/8, 172.16.1.0/24, 192.168.0.0/16 B. 10.1.1.0/24, 10.1.2.0/24, 172.16.1.0/26, 192.168.1.0/26, 192.168.2.0/26 C. 10.1.1.0/24, 10.1.2.0/24, 172.16.1.0/26, 172.16.2.0/26, 192.168.1.0/26, 192.168.2.0/26 D. 10.1.1.1/24, 10.1.2.1/24, 172.16.1.1/26, 172, 192.168.1.1/26, 192.168.2.1/26 Answer: B QUESTION 623 What is the most common use for route tagging in EIGRP? A. to determine the route source for management purposes B. to change the metric of a prefix C. to filter routes in order to prevent routing loops D. to modify path selection for certain classes of traffic Answer: C QUESTION 624 Refer to the exhibit. Which statement is true?

```

RPI#show ipv6 mroute
Multicast Routing Table
Flags: D - Dense, S - Sparse, B - Bidir Group, s - SSM Group,
       C - Connected, L - Local, I - Received Source Specific Host Report,
       P - Pruned, R - RP-bit set, F - Register flag, T - SPT-bit set,
       J - Join SPT
Timers: 0:00:00/Expires
Interface: Ethernet2/0/0
(*, FF7E:200:2A02:B111:FC02:1:1:1, 00:00:35/never, RP
2A02:B111:FC02:1:1:1, flags: SCLJ
Incoming interface: Null
RPF nbr: ::
Immediate outgoing interface list:
Ethernet2/0, Forward, 00:00:35/never
  
```

A. The output shows an IPv6 multicast address with link-local scope. B. The output shows an IPv6 multicast address that is used

for unique local sources only.C. The output shows an IPv6 multicast address that can be used for BIDIR-PIM only.D. The output shows an IPv6 multicast address with embedded RP. Answer: D QUESTION 625Which two statements about the max-age time in IS-IS are true? (Choose two.) A. The IS-IS max-age time is 20 minutes by default.B. The IS-IS max-age time is 60 minutes by default.C. The IS-IS max-age time increments from zero to max-age.D. The IS-IS max-age time decrements from max-age to zero. Answer: AD QUESTION 626Which two statements about the default behavior of IS-IS are true? (Choose two.) A. The default IS-IS router type is L1/L2.B. The default IS-IS metric type is wide.C. The default IS-IS interface circuit type is L1/L2.D. By default, two IS-IS routers must use the same hello interval and hold timer in order to become neighbors. Answer: AC QUESTION 627Which two statements about BPDU guard are true? (Choose two.) A. The global configuration command spanning-tree portfast bpduguard default shuts down interfaces that are in the PortFast-operational state when a BPDU is received on that port.B. The interface configuration command spanning-tree portfast bpduguard enable shuts down only interfaces with PortFast enabled when a BPDU is received.C. BPDU guard can be used to prevent an access port from participating in the spanning tree in the service provider environment.D. BPDU guard can be used to protect the root port.E. BPDU guard can be used to prevent an invalid BPDU from propagating throughout the network. Answer: AC QUESTION 725Drag and Drop Question Drag and drop each PHB on the left to the functionality it performs on the right.

Default	Provides low-latency, low-loss, low-jitter, and assured bandwidth service.
Expedited Forwarding	Provides backward compatibility with IP-precedence.
Assured Forwarding	Assigns best effort service to the packet.
Class Selector	Defines classes for traffic allocation

Answer:

Default	Expedited Forwarding
Expedited Forwarding	Class Selector
Assured Forwarding	Default
Class Selector	Assured Forwarding

QUESTION 726Drag and Drop QuestionDrag and drop each policy command on the left to the function it performs on the right.

Answer:

bandwidth	bandwidth
random-detect	shape
service-policy	police
police	fair-queue
shape	service-policy
fair-queue	random-detect

QUESTION 727Which topology allows the split-horizon rule to be safely disabled when using EIGRP? A. full meshB. partial meshC. hub and spokeD. ring Answer: C Braindump2go is one of the Leading 400-101 Exam Preparation Material Providers Around the World! We Offer 100% Money Back Guarantee on All Products! Feel Free In Downloading Our New Released 400-101

Real Exam Questions!

Compared Before Buying Cisco 400-101 PDF & VCE!		
Pass4sure	Braindump2go	Test King
	100% Pass OR Money Back	
650 Q&As – Practice	727 Q&As – Real Questions	650 Q&As – Practice
269.96	\$99.99	278.96
No Discount	Coupon Code: BDNT2014	No Discount

<http://www.braindump2go.com/400-101.html>