


[2017-Feb-NewFree 300-115(SWITCH) New PDF Dumps & 300-115(SWITCH) New VCE Dumps Offered by Braindump2go[1-5

2017 February NEW Cisco CCNP 300-115(SWITCH) Exam Dumps and 300-115(SWITCH) PDF and VCE Dumps

Updated!1.|2017 NEW 300-115(SWITCH) PDF and VCE Dumps 242Q&As Download:

<http://www.braindump2go.com/300-115.html> 2.|2017 NEW 300-115(SWITCH) Exam Questions & Answers:

<https://1drv.ms/f/s!AvI7wzKf6QBjgSVgicAB52AMWrK2> QUESTION 1Refer to the exhibit, which statement about the current configuration on port GigabitEthernet2/0/1 is true?

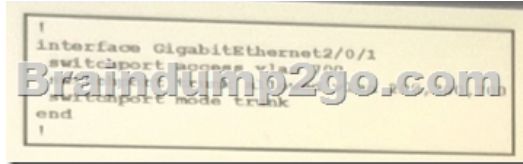

A. It is an access port configured for a phone and a PC. It is a trunk port and the native VLAN is VLAN1. It is a trunk port and the native VLAN is VLAN 700. It is an access port in VLAN 700. Answer: B QUESTION 2Which two statements about default HSRP behavior are true? (Choose two) A. A backup GLBP active virtual gateway can become active only if the current active virtual gateway fails. B. Preemption is enabled by default. C. Unless specifically configured, the priority of an HSRP router is 200. D. A standby HSRP router becomes active if it has a higher priority than the priority of the current active router. E. A VRRP backup virtual router becomes the master router if its priority is higher than the priority of the current master router. Answer: DE QUESTION 3If StormControl is enabled on a port and the traffic reaches the configured level, which two actions can be configured to occur? (Choose two) A. Trap B. notify admin C. redirect traffic D. log E. shut down Answer: AC QUESTION 4Which two options are advantages of deploying VTPv3? (Choose two) A. It stores the VTP domain password securely as a SHA-1 hash. B. It adds an FCS field at the end of each VTP frame for consistency checking. C. It supports the propagation of private VLANs. D. It supports the use of AES to encrypt VTP messaging. E. It can be configured to allow only one VTP server to make changes to the VTP domain. Answer: DE QUESTION 5Which statement about HSRP, GLBP, and VRRP is true? A. VRRP group members communicate using multicast address 224.0.0.102. B. MAC address 0000.0c07.ac0c indicates that default gateway redundancy is provided through GLBP. C. HSRP group members communicate using multicast address 224.0.0.18. D. GLBP uses UDP port 3222 (source and destination) for hello messages. Answer: A !!!RECOMMEND!!! 1.|2017 NEW 300-115(SWITCH) PDF and VCE Dumps 242Q&As Download:<http://www.braindump2go.com/300-115.html> 2.|2017 NEW 300-115(SWITCH) Study Guide Video: YouTube Video: [YouTube.com/watch?v=F80pJHRw-Xc](https://www.youtube.com/watch?v=F80pJHRw-Xc)