
## Become Cisco 350-080 Certified With Braindump2go's New 350-080 Test Dumps (201-210)


CISCIO NEW UPDATED: New Updated 350-080 Exam Questions from Braindump2go 350-080 PDF Dumps and 350-080 VCE Dumps! Welcome to Download the Newest Braindump2go 350-080 VCE&PDF Dumps:

http://www.braindump2go.com/350-080.html (394 Q&As) New Braindump2go 350-080 Exam Questions Updated Today! Want to know New Questions in 2015 350-080 Exam? Download Free Braindump2go 350-080 Exam Preparation Materials Now! Vendor: CiscoExam Code: 350-080Exam Name: CCIE Data Center Written Exam350-080 Dumps,350-080 Exam Dumps,350-080 Brainfump,350-080 Questions,350-080 VCE,350-080 PDF,350-080 Actual Test,350-080 Study Guide,350-080 Book,350-080 CCIE

<u>Data Center Written Exam,350-080 Test</u> CCIE Data Center Written Exam: 350-080

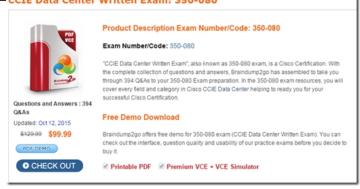

QUESTION 201Refer to the exhibit. While attempting to modify a management firmware package, you receive the error that is shown in the exhibit. Which two statements explain this error? (Choose two.)



A. The management firmware package that is referenced by the service profile has been deleted.B. The Cisco UCS Manager version is 2.1 or later.C. Cisco Integrated Management Controller firmware should be managed via the host firmware policy.D. You cannot modify the management firmware directly when a policy has been assigned.E. The user that is logged into Cisco UCS Manager does not have sufficient privileges. Answer: BC QUESTION 202Drag and Drop Question



Answer:



QUESTION 203Drag and Drop Question



Answer:




QUESTION 204Refer to the exhibit. When the engineer tried to check CoPP on the switch, the engineer observed the error that is shown in the exhibit. Which option describes the reason for the displayed output?

played output?

Nexus7KH sh policy-map interface control-plane
invalid interface forma at marker.

The Cisco NX-OS version that is running does not support CoPP.B. The CoPP feature is not enabled on this switch.C. CoPP CLI is available from the default VDC.D. CoPP is enabled by default but not configured. Answer: C QUESTION 205How many ACL capture sessions can be configured on a Cisco Nexus 7000 switch? A. ACL capture is not supported on the Cisco Nexus 7000 switch.B. Only one ACL capture session can be active at any given time in the system across virtual device contexts. C. Only one ACL capture session can be active in each virtual device context.D. The number of ACL capture sessions depends on the space that is available within the ACL Ternary Content Addressable Memory.E. Only one ACL capture session is supported per VLAN. Answer: B QUESTION 206On a Cisco Nexus 7000 device, on which port type can port security be configured? A. Access portsB. SPAN destination portC. trunk portsD. public VLAN-enabled ports Answer: A QUESTION 207Which statement is true about DHCP snooping on the Cisco Nexus 7000 platform? A. DHCP snooping cannot be enabled globally and on a per-VLAN basis.B. By default, DHCP snooping is disabled globally and on all VLANs.C. You can enable DHCP snooping on a single VLAN only.D. For DHCP snooping to function properly, all DHCP servers must be connected to the device through untrusted interfaces. Answer: B QUESTION 208Which two statements about VDC configuration and limitations are true? (Choose two.) A. Standard VDCs cannot share interfaces, VLANs, or VRF tables.B. Any user can create VDCs.C. Only the network administrator role can use the switchto vdc command.D. After a network administrator uses the switchto vdc command, the network administrator becomes a VDC administrator for the new VDC.E. There is no CLI command to return to the original VDC. Answer: AD QUESTION 209Refer to the exhibit. You configured a port on a Cisco Nexus 7000 switch as a trunk port. Which VLANs are allowed on the trunk port based on the port configuration in the exhibit? A. No VLANs are allowed by default. Use the switchport trunk allowed vlan 1-4094 command to allow all VLANs.B. Only Native VLAN 1 will be allowed.C. VLANs 1 to 3967, and 4048 to 4094 are allowed.D. VLANs 1 to 3900, and 4048 to 4094 are allowed.E. VLANs 1 to 4094 are allowed. Answer: C QUESTION 210Which three prerequisites must be met before configuring FabricPath on a Cisco Nexus 7000 switch? (Choose three.) A. Ensure that the Enhanced Layer 2 license is installed on the switch.B. The FabricPath feature set must be installed on the default and non-default VDCs.C. Spanning tree must be disabled on the switch.D. Ensure that you are working on the F Series module.E. Ensure that you are working on the M Series module.F. The FabricPath feature set must be installed only on the default VDC. Answer: ABD Braindump2go New Updated 350-080 Exam Dumps are Complete Cisco 350-080 Course Coverage! 100% Real Questions and Correct Answers Guaranteed! Updated 350-080 Preparation Material with Questions and

Answers PDF Instant Download:

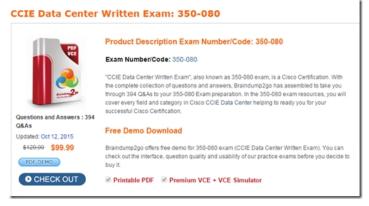

FREE DOWNLOAD: NEW UPDATED 350-080 PDF Dumps & 350-080 VCE Dumps from Braindump2go: http://www.braindump2go.com/350-080.html (394 Q&A)