
## [Braindump2go Free 642-999 Exam Dumps PDF Download (1-11)

## CISCO NEWS: 642-999 Exam Questions has been Updated Today! Get Latest 642-999 VCE and 642-999 PDF Instantly! Welcome to Download the Newest Braindump2go 642-999 VE&642-999 PDF Dumps:

http://www.braindump2go.com/642-999.html (135 Q&As) We never believe in second chances and Braindump2go brings you the best 642-999 Exam Preparation Materials which will make you pass in the first attempt.We guarantee all questions and answers in our 642-999 Dumps are the latest released,we check all exam dumps questions from time to time according to Cisco Official Center, in order to guarantee you can read the latest questions! Exam Code: 642-999Exam Name: Implementing Cisco Data Center Unified Computing (DCUCI)Certification Provider: Cisco642-999 Dump,642-999 PDF,642-999 VCE,642-999 Exam Questions,642-999 DCUCI Study Guide,642-999 DCUCI Dumps,642-999 DCUCI Book,642-999 DCUCI Exam,642-999 DCUCI Training,642-999 Book,642-999 Braindump,642-999 eBook,642-999 Practice Exam,642-999 Practice Test,642-999 Practice Questions

## Implementing Cisco Data Center Unified Computing (DCUCI):

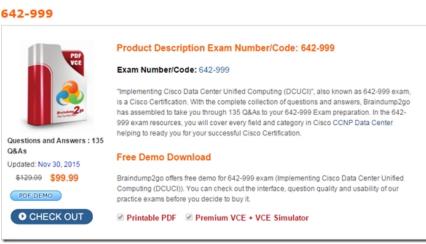

QUESTION 91Which option does UEFI secure boot provide? A. checksum verification of the EFI shellB. certificate verification of the EFI shellC. checksum verification of the OSD. certificate verification of the OS Answer: D QUESTION 92 Which component is unsupported by the UEFI boot device in the Cisco UCS C-series standalone? A. FlexFlash cardB. RAID arrayC. FCoED. iSCSIE. USBF. PXEG. PCI SSD Answer: G QUESTION 93Which statement about Cisco Integrated Management Controller secure mode is true? A. After you enable it, you cannot disable it.B. After you enable it, you cannot downgrade the Cisco Integrated Management Controller firmware.C. It verifies the OS before allowing it to boot.D. The server must reboot to apply. Answer: A QUESTION 94When implementing a Cisco UCS C-series standalone server, which of the following Cisco Integrated Management Controller NIC modes allow use of the least number of physical ports while providing maximum levels of redundancy? A. dedicatedB. shared LOMC. shared LOM 10GD. Cisco VIC Answer: D QUESTION 95 Which option describes what Cisco Integrated Management Controller Network Security provides? A. protection against DDoS on the Cisco IMCB. a whilelist that specifies the servers allowed to access the Cisco IMCC. 802.1x support, allowing the Cisco IMC to log in to a port security networkD. user-configured ACLs to block known bad servers from accessing the Cisco IMC Answer: A QUESTION 96Which port type mode must be used on a Cisco UCS Manager for a SPAN port? A. eth-traffic-monB. eth-uplinkC. eth-serverD. eth-storage Answer: A QUESTION 97Where would you disable or enable Cisco Discovery Protocol? A. LAN connectivity policyB. service profileC. network control policyD. LAN uplinks manager Answer: C QUESTION 98 Which three statements about default settings for fabric interconnect uplink ports are true? (Choose three.) A. When a VLAN is configured, it is trunked on all uplinks.B. Specific VLANs are trunked on specific uplinks.C. UDLD is enabled.D. UDLD is disabled.E. Cisco Discovery Protocol is enabled.F. Cisco Discovery Protocol is disabled.G. They connect to the I/O modules. Answer: ADE QUESTION 99Refer to the exhibit. An admin is configuring VLANs on a Cisco UCS B-Series vNIC. Which two Properties statements about the traffic coming from the operating system with this configuration are true? (Choose two.)

Name: mgmt-vlan-14 MAC: Derived VLAN ID: 832 BFENINCLIMP2 Owner: Logical Type: Ether Operational VLAN Instance: fabric/lan/net-m Operational VLAN Name: mgmt-vlan-14 A. The VLAN must be configured with ID 832 within the operating system.B. No VLAN tag should be added in the operating system.C. If traffic comes in untagged on this vNIC, it is placed in VLAN 832.D. This configuration is not supported when hypervisors are used.E. The uplink ports of the fabric interconnect have the native VLAN set to ID 832. Answer: BC QUESTION 100Refer to the exhibit. Which two statements about the fabric interconnect are true? (Choose two.) FI-B(nxos)# show platform software cam internal in

| ····/ ··· ·                        |
|------------------------------------|
|                                    |
| Designated receiver: Po21          |
| Membership:                        |
| Po22 Eth1/32 Eth1/20 Po1 Po21 Po30 |
|                                    |

A. The fabric interconnect forwards all broadcast packets on VLAN 311 out of each interface listed in the Membership.B. The fabric interconnect forwards broadcasts on VLAN 311 only when they are received on Po21.C. Without any changes to the switch, eth 1/32 could become the designated receiver for VLAN 311.D. All multicast traffic from a blade on VLAN 311 goes out of Po21.E. IGMP join packets from blades on VLAN 311 goes out Po21. Answer: BE Braindump2go New Released 642-999 Dumps PDF are Now For Free Download, 438 Latest Questions, Download It Right Now and Pass Your Exam 100%:



FREE DOWNLOAD: NEW UPDATED 642-999 PDF Dumps & 642-999 VCE Dumps from Braindump2go: http://www.braindump2go.com/642-999.html (135 Q&A)