
Braindump2go New Updated Cisco 350-080 Questions are 100% Same With the Real Cisco 350-080 Test (241-250)

CISCIO NEW UPDATED: New Updated 350-080 Exam Questions from Braindump2go 350-080 PDF Dumps and 350-080 VCE Dumps! Welcome to Download the Newest Braindump2go 350-080 VCE&PDF Dumps:

http://www.braindump2go.com/350-080.html (394 Q&As) Braindump2go New Released 350-080 Exam Dumps Questions New Updated Today: Latest 394 Questions and Answers Explanation. Guarantee you 100% Success when you attend Cisco MCM 350-080 Exam! We update 350-080 Exam Dumps Questions every day and you can come to download our latest 350-080 Practice Tests daily! Vendor: CiscoExam Code: 350-080Exam Name: CCIE Data Center Written Exam350-080 Dumps,350-080 Exam Dumps,350-080 Brainfump,350-080 Questions,350-080 VCE,350-080 PDF,350-080 Actual Test,350-080 Study Guide,350-080

Book,350-080 CCIE Data Center Written Exam,350-080 Test CCIE Data Center Written Exam: 350-080

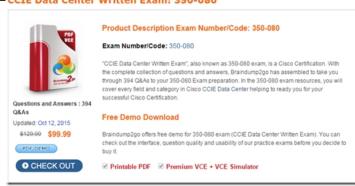

QUESTION 241Which two server models support single-wire management for Cisco UCS C-Series integration with Cisco UCS Manager? (Choose two.) A. Cisco UCS C200 M2 serverB. Cisco UCS C250 M2 serverC. Cisco UCS C260 M2 serverD. Cisco UCS C240 M3 serverE. Cisco UCS C240 M2 server Answer: CD QUESTION 242Refer to the exhibit. Assume that the Cisco UCS 6200 Series Fabric Interconnects are equipped with 16 port expansion modules. What is the impact of the last command in the exhibit.

A. Fabric interconnect B will reboot.B. The expansion module on fabric interconnect B will reload.C. The command will generate an error.D. Both fabric A and B expansion modules will reload.E. The expansion module on fabric interconnect B will reload according to the maintenance policy that is set by Cisco UCS Manager. Answer: C QUESTION 243You have configured a Cisco UCS C460 M2 Rack-Mount Server with two VIC 1225 adapters for single-wire management with Cisco UCS Manager. Which statement correctly describes the operation of these adapters? A. One VIC is designated to carry management, and the other VIC is designated to carry data traffic.B. Both VICs will be used for management and data traffic.C. One VIC will carry management, and both VICs will carry data traffic.D. The Cisco UCS C460 M2 does not support two VIC 1225 adapters simultaneously. Answer: C QUESTION 244Refer to the exhibit. Which option describes the output that is shown in bold in the

exhibit? Fif248-BF connect adapter 1/2/1 adapter 1/2/1 f connect adapter 1/2/1 (kgp):14 wrice (enip) f will adapter 1/2/1 (kgp):15 wrice adapter 1/2/1 f connect adapter 1/2/1 f c

A. This output represents a standby VIF.B. This output indicates that fabric failover has been enabled on vNIC 3.C. This output represents a reserved system VIF.D. This output represents an unpinned interface. Answer: A QUESTION 245Which two FEX connection modes are correct? (Choose two.) A. hard-pinning modeB. soft-pinning modeC. port channel modeD. physical-pinning modeE. vlan pinning mode Answer: AC QUESTION 246Which four port types are included in the VLAN port count? (Choose four.) A. border uplink Ethernet portsB. border uplink EtherChannel member portsC. FCoE ports in a SAN cloudD. static and dynamic vNICs created through service profilesE. VLANsF. VSANsG. Private VSANsH. Private

VLANs Answer: ABCD QUESTION 247What is the default MTU for Fibre Channel on Cisco UCS Manager? A. 2112B. 2240 C. 2000D. 9216 Answer: B QUESTION 248Refer to the ex hibit. How many additional chassis equipped with Cisco UCS 2204XP I/O Modules could be connected at maximum bandwidth without exceeding the existing port licenses?

Properties

None ETH_PORT_ACTIVATION_PEG

Stope A

All Activation Comments


Open structured by the Stopes

Per License Court Companion. Matching

Properties

Prop

A. 1B. 2C. 3D. 4E. 5 Answer: B QUESTION 249Which two items have an impact on the maximum number of virtual interfaces that can be created on a virtual interface card? (Choose two.) A. number of blades in the chassisB. number of acknowledged links between the Fabric Interconnect and the I/O moduleC. number of connected uplinksD. number of Fabric Interconnect port ASICs used by uplinksE. number of Fabric InterconnectsF. number of VIC Answer: BD QUESTION 250 Which feature must be enabled on the upstream Fibre Channel switch if the fabric interconnect is configured in end-host mode? A. NPVB. NPIVC. ZoningD. Smart Zoning Answer: B Braindump2go New Released 350-080 Dumps PDF are Now For Free Download, 394 Latest Questions, Download It Right Now and Pass Your Exam 100%: CCIE Data Center Written Exam: 350-080



FREE DOWNLOAD: NEW UPDATED 350-080 PDF Dumps & 350-080 VCE Dumps from Braindump2go: http://www.braindump2go.com/350-080.html (394 Q&A)