
[NEW UPDATED2015 Latest Braindump2go 400-101 Exam Questions PDF Free Download

CISCO NEWS: 400-101 Exam Questions has been Updated Today! Get Latest 400-101 VCE and 400-101 PDF Instantly! Welcome to Download the Newest Braindump2go 400-101 VCE&400-101 PDF Dumps:

http://www.braindump2go.com/400-101.html (889 Q&As)

400-101 Dumps,400-101 PDF,400-101 VCE,400-101 Actual Test PDF,400-101 Book,400-101 Exam Questions,400-101 Braindumps,400-101 eBook,400-101 Study Guide,400-101 Practice Exam,400-101 Practice Test,400-101 Practice Questions

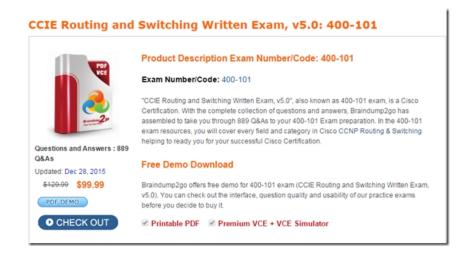

QUESTION 865

Which IPv6 tunneling mechanism requires a service provider to use one of its own native IPv6 blocks to guarantee that its IPv6 hosts will be reachable?

- A. 6rd tunneling
- B. automatic 6to4 tunneling
- C. NAT-PT tunneling
- D. ISATAP tunneling
- E. manual ipv6ip tunneling
- F. automatic 4to6 tunneling

Answer: A

QUESTION 867

Which two discovery mechanism does LDP support? (Choose two.)

- A. strict
- B. extended
- C. loose
- D. targeted
- E. basic

Answer: BE

OUESTION 868

On a network using RIPng, the prefix field of a routing table entry has a value of 0:0:0:0:0:0:0:0:0:0. What does this value signify?

- A. The next hop address is unknown.
- B. The next hop address is a site-local address.
- The neighboring router has IPv6 ND disabled.
- The next hop address must be the originator of the route advertisement.
- The associated route follows a default route out of the network.

Answer: E

OUESTION 869

Which AS_PATH attribute can you use to prevent loops when implementing BGP confederations?

- A. AS_CONFED_SET
- B. AS_SEQUENCE
- C. AS_CONFED_SEQUENCE
- D. AS SET

Answer: C

QUESTION 870

Which two statements about OSPF are true? (Choose two.)

- A. External type 2 routes are preferred over interarea routes.
- B. Intra-area routes are preferred over interarea routes.
- C. External type 1 routes are preferred over external type 2 routes.
- D. External type 1 routes are preferred over intra-area routes.
- E. External type 2 routes are preferred over external type 1 routes.

Answer: BC

QUESTION 871

Which two statements about the OSPF two-way neighbor state are true? (Choose two.)

- A. Each neighbor receives its own router ID in a hello packet from the other neighbor.
- B. Each neighbor receives a hello message from the other neighbor.
- C. It is valid only on NBMA networks.
- D. It is valid only on point-to-point networks.
- E. Each neighbor receives an acknowledgement of its own hello packet from the other neighbor.
- Each neighbor receives the router ID of the other neighbor in a hello packet from the other neighbor.

Answer: AE

OUESTION 874

Which two statements about device access control are true? (Choose two.)

The AUX port is displayed as type tty in the output of the show line command.

- B. VTY lines are associated with physical interfaces on a network device.
- C. MPP restricts device-management access to interfaces that are configured under the control plane host configuration.
- The enable password command sets an MD5 one-way encrypted password.
- The console port supports hardware flow control

Answer: CE

QUESTION 875

In the DiffServ model, which class represents the highest priority with the lowest drop probability? (*)

- A. AF13
- B. AF43
- C. AF11
- D. AF41

Answer: D

QUESTION 879

Which two methods can you use to limit the range for EIGRP queries? (Choose two.)

- A. Use an access list to deny the multicast address 224.0.0.1 outbound from select EIGRP neighbor and permit everything else.
- B. Configure route tagging for all EIGRP routes.
- Summarize routes at the boundary routers of the EIGRP domain.
- D. Configure unicast EIGRP on all routers in the EIGRP domain.
- Configure stub routers in the EIGRP domain.
- Use an access list to deny the multicast address 224.0.0.10 outbound from select EIGRP neighbors and permit everything else.

Answer: CE

OUESTION 880

Which two best practices does Cisco recommend to migrate a network from PVST+ to MST? (Choose two.)

- A. Start the migration at the edge nodes and work toward the root bridge.
- Before starting the transition, configure one of the edge nodes with a lower priority so that it becomes the root bridge after the transition.
- C. Before starting the transition, ensure that at least two nodes act as the root bridge for all VLANs in the network.
- Start the migration at the root bridge and work toward the edge nodes.
- E. Before starting the transition, configure one of the edge nodes with a higher priority so that it becomes the root bridge after the transition.
- Before starting the transition, ensure that one node is the root bridge for all VLANs in the network.

Answer: AF

OUESTION 883

Refer to the exhibit. Which two statements about this egress queue are true? (Choose two.)

- The queue 3 buffer is allocated 20 percent, its drop threshold is 100 percent, and it is guaranteed 400 percent of memory.
- The queue 1 buffer is allocated 30 percent, its drop threshold is 25 percent, and it is guaranteed 100 percent of memory.
- The queue 1 buffer is allocated 30 percent, its drop threshold is 100 percent, and it is guaranteed 150 percent of memory. C.
- The queue 2 buffer is allocated 30 percent, its drop threshold is 200 percent, and it can use at maximum 400 percent of memory.

E. The queue 3 buffer is allocated 30 percent, its drop threshold is 100 percent, and it can use at maximum 400 percent of memory.

Answer: BD

QUESTION 884

Which two statements about the function of PIM designated router are true? (Choose two.)

- A. It registers directly connected source to the PIM rendezvous point.
- B. It sends PIM asserts on the interface of the outgoing interface list.
- C. It sends PIM Join/Prune messages for directly connected receivers.
- D. It forwards multicast traffic from the source into the PIM network.
- E. It sends IGMP queries.

Answer: AC

OUESTION 885

Refer to exhibit. The router is unreachable using telnet. Which option is solution?

```
vrf definition NCMT
rd 1:1
address-family ipv4
!
interface GigabitEthernet0/0
vrf forwarding MCMT
rp address 92.168.0 1755.255.255.0
ip access-list standard McMT
permit any
!
line vty 0 4
access-class MCMT in
transport input telnet
transport output none
```

- A. Use an extended access list instead of standard access list.
- B. The transport output telnet command must be added.
- C. The VRF configuration must be completed.
- D. The "vrf-also" keyword must be added to the access-class configuration.

Answer: D

FREE DOWNLOAD: NEW UPDATED 400-101 PDF Dumps & 400-101 VCE Dumps from Braindump2go:

http://www.braindump2go.com/400-101.html (889 Q&As)

