


[Oct.-2016-NewFree Braindump2go 400-351 PDF Dumps Download 165Q&As[NQ1-NQ6]

2016/10 New CCIE Wireless 400-351: CCIE Wireless Written Exam, v3.1 Exam Questions Updated Today!Free Instant Download 400-351 Exam Dumps (PDF & VCE) 165Q&As from Braindump2go.com Today! 100% Real Exam Questions! 100% Exam Pass Guaranteed! 1.|2016/10 400-351 Exam Dumps (PDF & VCE) 165Q&As Download:<http://www.braindump2go.com/400-351.html> 2.|2016/10 400-351 Exam Questions & Answers:

<https://drive.google.com/folderview?id=0BwwEErkugSaLSTMyUDhOZG1ET1k&usp=sharing> QUESTION 1Refer to the exhibit, based upon the given configuration which two statement are true? (choose two)

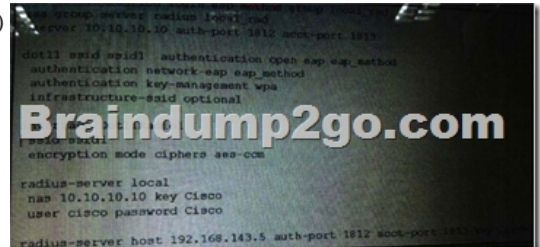


A. local RADIUS server is usedB. No password is required everyone can join wireless networkC. Users will be required to provide a username and password for authenticationD. User will be required to provide a password only order to get accessE. Remote RADIUS servers is used Answer: AC QUESTION 2Which two features require Network Time Protocol synchronization on the Cisco 5760 WLC?(Choose two) A. AP CAPWAP multicastB. SNMPv3C. AP authenticationD. Band Select Answer: BC QUESTION 3Refer the exhibit, the created dynamic interfaces are bound to an interface group for a specific WLAN profile in a Cisco Wireless LAN Controller. You have noticed duplicated multicast streams on the wireless medium for the given WLAN profile. Which statement is correct?

Layer3 MGLD Mapping:			
Number of Layer3 MGLDs..... 4			
239.0.1.2	101	12350	IGMP
239.0.1.2	102	12351	IGMP
239.0.1.2	103	12352	IGMP
239.0.1.2	104	12353	IGMP

A. Globalmulticast mode,global 1Pv6 config,and multicast listener discovery snooping have not been enabled. Enable this to avoid duplicate streams.B. Global multicast mode and internet group management protocol snooping have not been enabled . To avoid stream enable both .C. The controller creates different multicast groups IDs for each multicast address and VLAN and a result the upstream router sends one copy for each VLAN.Enable Multicast VLAN to avoid duplicate streams.D. The controller always uses layer 3 multicast group 10 for all layer 3 multicast traffic sent to the access point internet group management protocol snooping should be disabled to avoid duplicate streams. Answer: C QUESTION 4Refer to the exhibit the autonomous AP has a corporate and guest SSID configured. The security team requested that you limit guest user traffic to DHCP ,DNS, and web browsing on the AP. Which configuration best satisfies the request?



A. access-list 101 permit udp any any eq 67access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80access-list 101 deny ip any anyinterface dot11 radio 0 ip access-group 101 inB. access-list 101 permit udp any any eq 67access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80access-list 101 deny ip any anyinterface dot11 radio 0 ip access-group 101 inC. access-list 101 permit udp any any eq 67access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80access-list 101 deny ip any anyinterface fast Ethernet 0 ip access-group 101 inD. access-list 101 permit udp any any eq 67access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80access-list 101 deny ip any anyinterface fast Ethernet 0 ip access-group 101 in Answer: C QUESTION 5Refer to the exhibit. The network operations center is using PI to collect and monitor the AVC data from a cisco WLC. However no AVC information is showing up in cisco PI. Based on this information from the Cisco WLC reason that Cisco PI is not showing the information is True?



A. Cisco prime does not have the correct licensing installed. B. The monitor-Name and exporter-name do not match. C. The Exporter-IP should be the IP address of the cisco WLC. D. The port number should be 9991. Answer: D

QUESTION 6 Which two statements about LAG in the Cisco wireless LAN controller running Aire OS 8.0 are true? (choose two)

A. LAG bundles all of the cisco WLC distribution system ports into a single 802.3ad port channel. B. There can be only one AP-manager interface if LAG is enabled. C. LAG configuration changes take effect immediately after they are configured. D. Channel negotiation LACP and PAgP are supported. Answer: AB

!!!RECOMMEND!!!

1. [Braindump2go|2016/10 400-351 Exam Dumps \(PDF & VCE\) 165Q&As](#)
Download: <http://www.braindump2go.com/400-351.html>

2. [Braindump2go|2016/10 400-351 Exam Questions & Answers: https://drive.google.com/folderview?id=0BwwEERkugSaLSTMyUDhOZG1ET1k&usp=sharing](#)